


Flashing compatibility guide


VELUX®

EDL/EBL/EKL

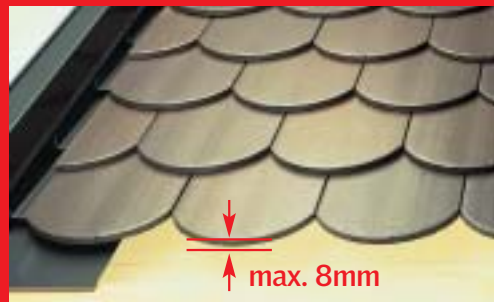


- For roof pitches from 15-90°.
- Flashing for installing roof window into slate up to 8mm thick.
- Not for interlocking slate.

EDN

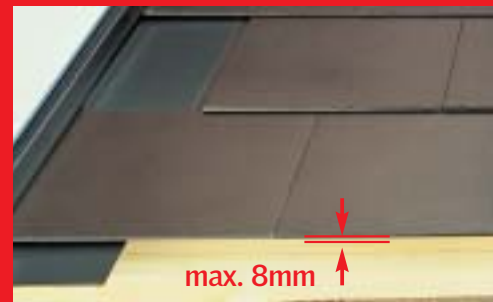


- For roof pitches from 35-90°.
- For recessed installation of one roof window into slate up to 8mm thick.
- Not for interlocking slate.
- Coupled version also available.

EDZ

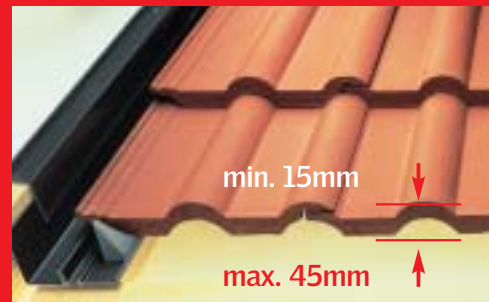


- For roof pitches from 20-90°.
- Flashings for installing one roof window in flat or profiled roofing material.
- Minimum profile of 15mm and maximum profile of 45mm.

EDW/EBW/EKW

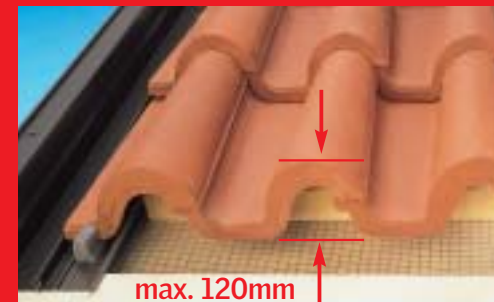

- For roof pitches from 15-90°.
- Flashings for installing roof window in flat or profiled roofing material up to 120mm in profile.
- Also for interlocking slate, thatch and profile sheeting.

EDP/EBP/EKP

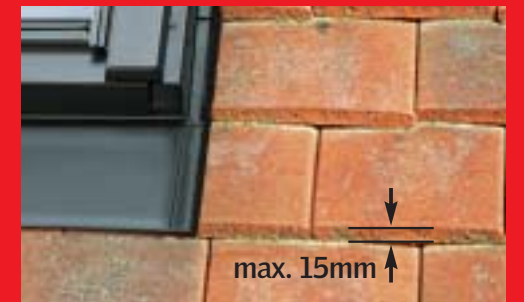


- For roof pitches from 25-90°.
- For installing roof window in plain tiles (max length 340mm).
- Maximum thickness of 15 mm.



Refer to the roof covering manufacturer for the minimum roof pitch at which each slate and tile can be laid.

Double Roman




Mini Slate



Vintage 15" x 9"




Roadstone Slate



Centurion



SL8




Gemini Twin Tile



Spanish Roll



Plain Tile

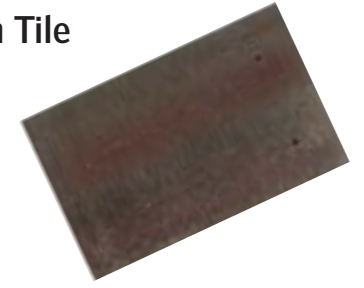

Flashing	Installation	Roof pitch	Flashing	Installation	Roof pitch
EDW	Single	15° - 90°	EBW	Twin	15° - 90°
EDZ	Single	20° - 90°	EKW	Combi	15° - 90°

Flashing	Installation	Roof pitch
EDW	Single	15° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

Flashing	Installation	Roof pitch
EDP	Single	25° - 90°
EBP	Twin	25° - 90°
EKP	Combi	25° - 90°



ThrutonePlus Smooth



ThrutonePlus Relief



Rivendale



Villar del Rey Natural Slate



Canadian Heather Natural Slate



Bretona Natural Slate



Flashing	Installation	Roof pitch	Flashing	Installation	Roof pitch
EDL	Single	15° - 90°	EBL	Twin	15° - 90°
EDN	Single	35° - 90°	EKL	Combi	15° - 90°



Locherne



Rathmore



Devenish



Western Slate



Flashing	Installation	Roof pitch
EDW	Single	15° - 90°
EDZ	Single	20° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

Redland

50 Double Roman



Mini Stonewold



Grovebury




Cambrian Slate



DuoPlain



Rosemary Clay



49 Tile



Valentia



Rathlin



Regent



Plain Tile



Flashing	Installation	Roof pitch	Flashing	Installation	Roof pitch
EDW	Single	15° - 90°	EBW	Twin	15° - 90°
EDZ	Single	20° - 90°	EKW	Combi	15° - 90°

Flashing	Installation	Roof pitch
EDW	Single	15° - 90°
EBW	Twin	15° - 90°
EKW	Combi	15° - 90°

Flashing	Installation	Roof pitch
EDP	Single	25° - 90°
EBP	Twin	25° - 90°
EKP	Combi	25° - 90°

Condron Concrete Works



Concrete Slate




M profile



Condron Slate



Pantile



Condron 3 in 1



Flashing	Installation	Roof pitch	Flashing	Installation	Roof pitch
EDW	Single	15° - 90°	EBW	Twin	15° - 90°
EDZ	Single	20° - 90°	EKW	Combi	15° - 90°

Flashing	Installation	Roof pitch
EDP	Single	25° - 90°
EBP	Twin	25° - 90°
EKP	Combi	25° - 90°

Find the right VELUX flashing for all roof coverings on the Installers Club at www.velux.ie and www.velux.co.uk